



# Unisto FastGrip 120

Security  
Logistics  
Identification  
Control

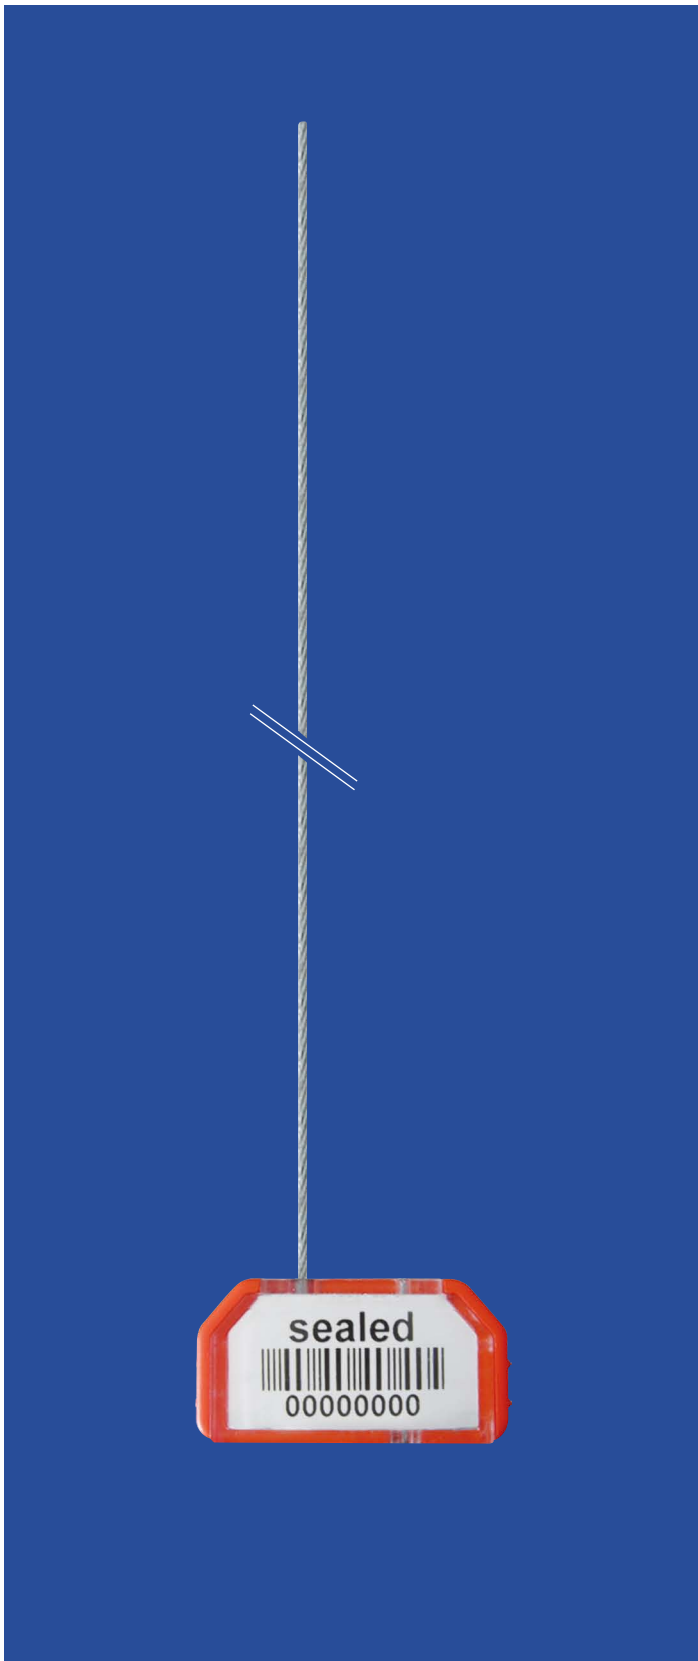

# Unisto FastGrip 120

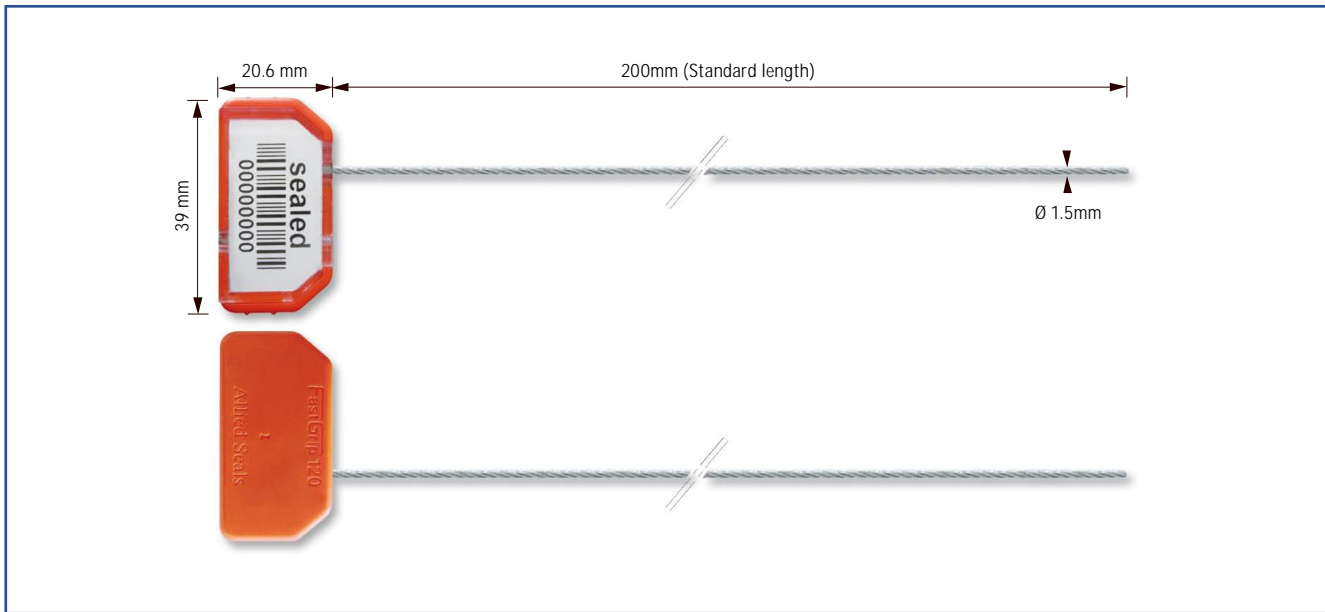

## Destructive Tests (ISO/IEC PAS 17712)

Tensile:	Above 1.5 kN
Shear:	Above 227 kg-f
Bend:	Above 501 Cycles (Flexible Seal)
Impact (low temperature):	Below 27.12 J
Impact (high temperature):	Below 27.12 J

## Material

Cover:	Acrylonitrile Styrene (Transparent)
Base:	Acrylonitrile/Butadiene Styrene (Coloured)
Identification tag:	Acrylonitrile Styrene (White Coloured)
Cable:	Galvanised Air Craft Cable
Locking Mechanism (Inter-locking Ring):	Heat-treated Carbon Steel
Locking Mechanism (Tension Spring):	Heat-treated High Tensile Steel

## Dimensions

Assembled Unit:	L 20.6 mm x W 39.0 mm x T 10.0 mm
Identification Tag:	L 16.5 mm x W 30.0 mm
Cable:	OD 1.5 mm x L 200 mm (Standard length)
Locking Mechanism (Inter-locking Ring):	OD 7.2 mm x T 3.5 mm
Locking Mechanism (Tension Spring):	OD 3.0 mm x L 9.0 mm x 12 Coils

## Identifications

Specification:	Ink-jet, Thermo Printed or Laser Marked
Logo/Abbreviations:	Customised Logo in 2 colours or Alphabets
Serial Numbers:	Max. 8 digits Alphanumeric or Barcode

## Packaging

Packing:	10 sequentially Seals bundled with Rubber Band 100 sequentially Bundles per Carton
Quantity:	1'000 Seals per Carton
Carton Dimensions:	L 449 mm x W 315 mm x H 250 mm
Carton Weight:	Approximate 11.28 kg

## Others

Colours:	Blue, Green, Orange, Yellow, Red, White (Special Colours on request)
----------	--

# Unisto Metalo 15



Security  
Logistics  
Identification  
Control



# Unisto Metalo 15



## Destructive Tests (ISO/IEC PAS 17712)

**Tensile:** Above 3.0 kN  
**Shear:** Below 227 kg-f  
**Bend:** Above 501 Cycles (Flexible Seal)  
**Impact (low temperature):**  
 Below 27.12 J  
**Impact (high temperature):**  
 Below 27.12 J

## Identifications Outer Casing

**Specification:** Laser Marked or Engraved  
**Logo/Abbreviations:** 1 colour  
**Serial Numbers:** Max. 7 digits Alphanumeric or Barcode

## Material

**Seal Casing:** Aluminium  
**Cable:** Galvanised Air Craft Cable  
**Locking Mechanism (Inter-locking Roller):**  
 Heat-treated Carbon Steel  
**Locking Mechanism (Tension Spring):**  
 Heat-treated High Tensile Steel

## Packaging

**Packing:** 10 sequentially Seals  
 bundled with Rubber Band  
 100 sequentially Bundles per Carton  
**Quantity:** 1'000 Seals per Carton  
**Carton Dimensions:** L 480 mm x W 260 mm x H 160 mm  
**Carton Weight:** Approximate 10,14 kg

## Dimensions


**Seal Casing:** L 23.0 mm x W 21.0 mm x T 7.0 mm  
**Cable:** OD 1.5 mm x L 200 mm  
 (Standard length)  
**Locking Mechanism (Inter-locking Roller):**  
 OD 7.2 mm x T 1.8 mm  
**Locking Mechanism (Tension Spring):**  
 OD 2.2 mm x L 8.0 mm x 9 Coils

## Others

**Colours:** Blue, Green, Orange, Yellow, Red, White  
 (Special Colours on request)



# Unisto Metalo 25

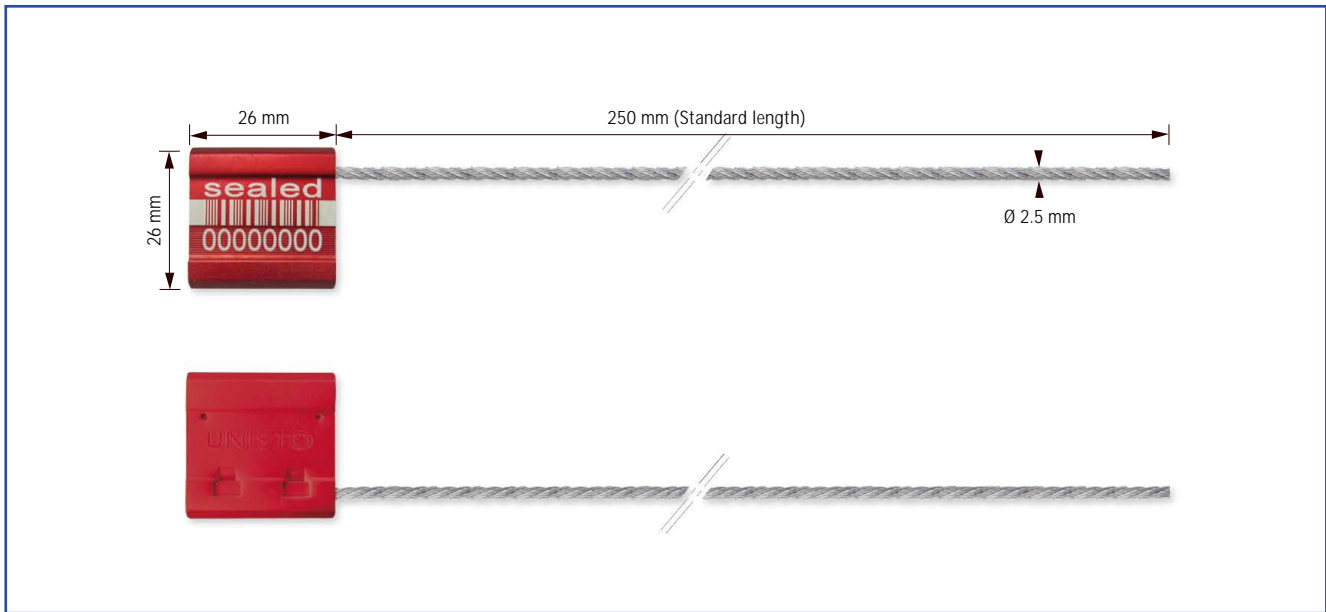

## Destructive Tests (ISO/IEC PAS 17712)

Tensile: Above 5.0 kN  
 Shear: Below 227 kg-f  
 Bend: Above 501 Cycles (Flexible Seal)  
 Impact (low temperature):  
     Below 27.12 J  
 Impact (high temperature):  
     Below 27.12 J

## Identifications Outer Casing

Specification: Laser Marked or Engraved  
 Logo/Abbreviations: 1 colour  
 Serial Numbers: Max. 7 digits Alphanumeric or Barcode

## Material

Seal Casing: Aluminium  
 Cable: Galvanised Air Craft Cable  
 Locking Mechanism (Inter-locking Roller):  
     Heat-treated Carbon Steel  
 Locking Mechanism (Tension Spring):  
     Heat-treated High Tensile Steel

## Packaging

Packing: 10 sequentially Seals  
     bundled with Rubber Band  
     25 sequentially Bundles per Carton  
 Quantity: 250 Seals per Carton  
 Carton Dimensions: L 310 mm x W 248 mm x H 135 mm  
 Carton Weight: Approximate 5,22 kg

## Dimensions

Seal Casing: L 26.0 mm x W 26.0 mm x T 8.5 mm  
 Cable: OD 2.5 mm x L 250 mm  
     (Standard length)  
 Locking Mechanism (Inter-locking Roller):  
     OD 7.2 mm x T 2.3 mm  
 Locking Mechanism (Tension Spring):  
     OD 3.5 mm x L 8.0 mm x 9 Coils

## Others

Colours: Blue, Green, Orange, Yellow, Red, White  
     (Special Colours on request)